

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM

IP-EALS30B31CU

PRODUCT FEATURES

- QSFP+ MSA compliant
- Supports 41.2 Gb/s aggregate bit rate
- 4x10Gb/s electrical interface
- Up to 10km on SMF and 300m on MMF(OM3)
- Hot-pluggable QSFP+ footprint
- LC duplex connector
- Maximum power consumption 3.5 Watts
- Single 3.3V power supply
- Support Digital Diagnostic Monitor interface
- Case operating temperature: 0°C to 70°C

APPLICATIONS

- 40GBASE-LX4 Ethernet
- Data Center Interconnect

COMPLIANCE

- QSFP+ MSA
- SFF-8436
- IEEE802.3
- RoHS 2.0


Ordering information

Part Number	Data Rate (Gb/s)	Media	Wavelength(nm)	Operating distance(km)	Temperature(°C)
IP-EALS30B31CU	41.2	SMF MMF	CWDM	SMF:10 MMF:0.3@OM3	0 ~ 70

PRODUCT DESCRIPTION

IP-EALS30B31CU is designed for 10km on SMF and 0.3km on MMF(OM3) optical communication applications. This module contains 4-lane DFB optical transmitter, 4-lane optical receiver and module management block including 2 wire serial interfaces. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.

1. Block Diagram

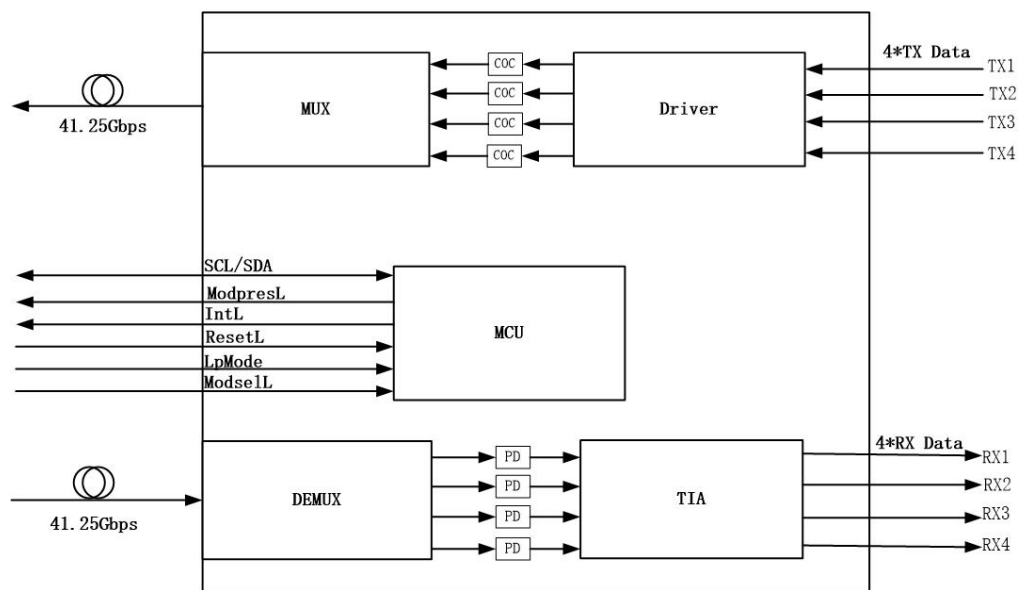

2. Pin Diagram

38	GND
37	Tx1n
36	Tx1p
35	GND
34	Tx3n
33	Tx3p
32	GND
31	LPMODE
30	Vcc1
29	VccTx
28	IntL
27	ModPrsL
26	GND
25	Rx4p
24	Rx4n
23	GND
22	Rx2p
21	Rx2n
20	GND

Module Card Edge

GND	1
Tx2n	2
Tx2p	3
GND	4
Tx4n	5
Tx4p	6
GND	7
Modsell	8
ResetL	9
VccRx	10
SCL	11
SDA	12
GND	13
Rx3p	14
Rx3n	15
GND	16
Rx1p	17
Rx1n	18
GND	19

3. Pin Descriptions

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM

IP-EALS30B31CU

Pin	Symbol	Name/Description	Notes
1	GND	Ground	1
2	Tx2n	Transmitter Inverted Data Input	
3	Tx2p	Transmitter Non-Inverted Data Input	
4	GND	Ground	1
5	Tx4n	Transmitter Inverted Data Input	
6	Tx4p	Transmitter Non-Inverted Data Input	
7	GND	Ground	1
8	ModSe1L	Module Select	
9	ResetL	Module Reset	
10	Vcc Rx	+3.3V Power supply receiver	
11	SCL	2-wire serial interface clock	
12	SDA	2-wire serial interface data	
13	GND	Ground	1
14	Rx3p	Receiver Non-Inverted Data Output	
15	Rx3n	Receiver Inverted Data Output	
16	GND	Ground	1
17	Rx1p	Receiver Non-Inverted Data Output	
18	Rx1n	Receiver Inverted Data Output	
19	GND	Ground	1
20	GND	Ground	1
21	Rx2n	Receiver Inverted Data Output	
22	Rx2p	Receiver Non-Inverted Data Output	
23	GND	Ground	1
24	Rx4n	Receiver Inverted Data Output	
25	Rx4p	Receiver Non-Inverted Data Output	
26	GND	Ground	1
27	ModPrSL	Module Present	
28	IntL	Interrupt	
29	VccTx	+3.3V Power supply transmitter	
30	Vcc1	+3.3V Power Supply	
31	LPMODE	Low Power Mode	
32	GND	Ground	1
33	Tx3p	Transmitter Non-Inverted Data Input	
34	Tx3n	Transmitter Inverted Data Input	
35	GND	Ground	1
36	Tx1p	Transmitter Non-Inverted Data Input	
37	Tx1n	Transmitter Inverted Data Input	
38	GND	Ground	1

Note:

1. Circuit ground is internally isolated from chassis ground.

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM

IP-EALS30B31CU

4. Absolute Maximum Ratings

It has to be noted that the operation in excess of any individual absolute maximum ratings might cause permanent damage to this module.

Parameter	Symbol	Min	Typical	Max	Unit	Note
Maximum Supply Voltage	V_{CC}	0		3.6	V	
Storage Temperature	T_s	-40		85	°C	
Relative Humidity	RH	5		85	%	
Damage threshold,per lane	P_{dam}	4			dBm	

5. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Unit	Note
Operating Case Temperature	T_{case}	0		70	°C	
Supply Voltage	V_{CC}	3.135	3.3	3.465	V	
Relative Humidity	R_H	5		85	%	
Data Rate (Optical)	DR_O		4*10.3125		Gbps	
Data Rate (Electrical)	DR_E		4*10.3125		Gbps	
Operating Link Distance			SMF:10 MMF:0.3@OM3		km	

6. Electrical Characteristics

40GBASE-LX4 Operation (EOL, TOP = 0 ~ 70°C, V_{CC} = 3.135 to 3.465V)

Parameter	Symbol	Min	Typical	Max	Unit	Notes
Power Dissipation				3.5	W	
Supply Current	I_{CC}			1.01	A	
Transmitter						
Data Rate, each lane			10.3125		Gbps	
Differential Voltage pk-pk	V_{pp}	300		850	mV	
Input differential impedance	R_{in}		100		Ohm	1
Differential Termination Resistance Mismatch				10	%	
Receiver						
Data Rate, each lane			10.3125		Gbps	
Output differential impedance	R_{out}		100		Ohm	1
Differential Termination Resistance Mismatch				10	%	
Differential output voltage	$V_{out, pp}$	260		850	mV	2

Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Into 100Ω differential termination.

7. Optical Characteristics

40GBASE-LX4 Operation (EOL, TOP = 0 ~ 70°C, V_{CC} = 3.135 to 3.465V)

Parameters	Symbol	Min	Typical	max	Unit	Notes
Transmitter						

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM

IP-EALS30B31CU

Signal Speed per Lane	BR	10.3125 ± 100 ppm			Gb/s	
Transmit wavelength	λ	1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5	nm	
		1304.5	1311	1317.5	nm	
		1324.5	1331	1337.5	nm	
Side-Mode Suppression Ratio	SMSR	30			dB	
Total Average Launch Power for SMF	P_{total}			8.3	dBm	
Total Average Launch Power for MMF				9.5	dBm	
Average launch power per lane for SMF	P_{out}	-7		2.3	dBm	
Average launch power per lane for MMF		-5.0		3.5	dBm	
Transmit OMA per Lane for SMF	T_{XOMA}	-4.0		3.5	dBm	
Transmit OMA per Lane for MMF		-4.0		4.5	dBm	
Launch power OFF per lane	P_{Off}			-30	dBm	
Transmitter and Dispersion Penalty (TDP), each lane	TDP			2.6	dB	
Extinction Ratio (ER)	ER	3.5			dB	
Transmitter eye mask definition {X1,X2, X3, Y1, Y2, Y3}	{0.23, 0.34, 0.43, 0.27, 0.35, 0.4}					1
Mask margin		10			%	1
Receiver						
Signaling Speed per Lane	BR	10.3125 ± 100 ppm			Gb/s	
Receive wavelength	λ	1264.5	1271	1277.5	nm	
		1284.5	1291	1297.5	nm	
		1304.5	1311	1317.5	nm	
		1324.5	1331	1337.5	nm	
Damage threshold, each lane	P_{max}			3.3	dBm	
Average receive power per lane for SMF		-13.7		2.3	dBm	
Average receive power per lane for MMF		-10.5		3.5	dBm	
Rx Sensitivity (OMA) per lane for SMF	R_{SEN}			-11.5	dBm	
Rx Sensitivity (OMA) per lane for MMF				-10.5	dBm	
Receiver reflectance	R_{fl}			-26	dB	
LOS Assert	LosA	-30			dBm	
LOS De-Assert	LosD			-12.5	dBm	
LOS Hysteresis	LosH	0.5		6	dB	

Note:

1. Hit ratio 5×10^{-5} .

8. Digital Diagnostic Monitoring Functions

IP-EALS30B31CU support the I²C-based Diagnostic Monitoring Interface (DMI) defined in document SFF-8436. The host can access real-time performance of transmitter and receiver optical power, temperature, supply voltage and bias current.

Parameter	Accuracy	Unit
Case Temperature	±3	°C
Supply Voltage	±3%	V
Tx Bias Current	±10%	mA
Tx Optical Power	±3	dB

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM


IP-EALS30B31CU

Rx Optical Power

± 3

dB

9. Mechanical Specifications

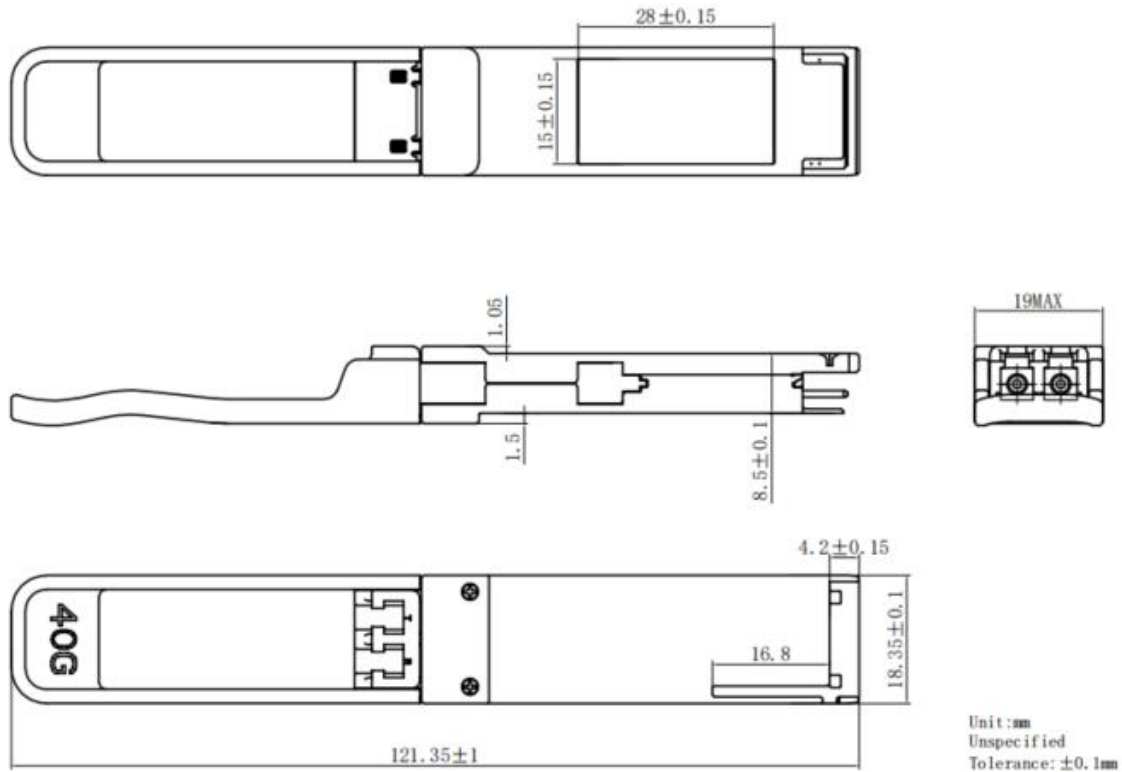

IP-EALS30B31CU

10. Regulatory Compliance

Feature	Reference	Performance
EMC	EN61000-3	Compatible with standards
Electrostatic Discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference (EMI)	FCC Part 15 Class B EN 55022 Class B (CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, EC/EN 60825-2	Class 1 laser product
Component Recognition	IEC/EN 60950, L 60950	Compatible with standards
RoHS 2.0	2002/95/EC	Compatible with standards

11. Contact Information

Wuhan Inphilight Technology Company Limited

NO.4 Building,Bonded Optoelectronics Industrial Park,Wuhan East Lake Comprehensive Bonded Area,NO.777-30 Optics Valley 3rd Road,East Lake Hi-Technology Development Zone,Wuhan, Hubei, China

Email: sales@inphilight.com

40GBASE-LX4 10km(SMF)@300m(MMF@OM3)QSFP+ Optical Transceiver with DDM

IP-EALS30B31CU

12. Revision History

Version No.	Date	Description
1.0	Jun. 24, 2019	Preliminary datasheet
1.1	May. 26, 2021	Add IP-EALS15B31CU
1.2	Oct. 8, 2021	Update contact Information
1.3	Feb.14, 2022	Update part number
1.4	Jul.8, 2022	Update mechanical specifications
1.5	Sep. 30, 2022	Update part number, contact Information and optical characteristics
1.6	Jun.30, 2024	Update contact information.